

“Single IP Address Management” Feature Enables Easy Network Management

The NETGEAR® low-cost, Fast Ethernet switches deliver maximum throughput and flexibility where you need it — to high-density workgroups at the edge of the network, or in the backbone of small networks. The ProSafe® FSM726v3 is managed 24-port switches with auto-sensing 10/100 ports and two 10/100/1000 ports. This enables fiber connectivity through two hot-swappable small form-factor pluggable (SFP) Gigabit interfaces. The non-blocking design of the switches delivers simultaneous, full wire-speed, low-latency throughput to all ports. In addition, their 1U rack-mount form factor uses less rack space and provides a lower per-port cost than comparable Fast Ethernet switches.

Multiple NETGEAR fully managed switches can be managed via a single IP address. Robust security features include IEEE 802.1x port-based authentication and access control lists (ACL), ensuring that only authorized users can access your network. Secure management of the switches is available through Secure Sockets Layer (SSLv3) for the Web GUI and Secure Shell (SSH) for command-line sessions. Additionally, switches can be securely managed via SNMPv3 with the NETGEAR ProSafe Network Management Software NMS100. For workgroup deployments in cost-sensitive organizations that require Layer 2 switching, and additional Gigabit capability, NETGEAR's ProSafe 10/100 Layer 2 Switches deliver the ideal access-edge solution.

Powerful

In desktop switching environments, wire-speed performance with full QoS control for all 10/100 interfaces is critical. The 2 Gigabit Ethernet combo interfaces provide unprecedented flexibility, attaching bandwidth-thirsty file servers, or aggregating critical data to the core of your network.

Easy-to-use


Simplify and reduce IT staff workload and mean time to repair with intuitive, GUI-based device configuration, and an industry-standard command-line interface (CLI). Additionally, up to 24 switches can be managed via a single IP address using the Web GUI interface.

Outstanding Value

With their high-value price point, flexible design, and reduced maintenance requirements, the NETGEAR ProSafe 10/100 Layer 2 Switch solutions yield a high return on investment, and are ideal for delivering highly reliable, converged voice, video, and data services over a single network infrastructure.

Like all NETGEAR ProSafe Managed Switches, the FSM726 is backed by the NETGEAR ProSafe Lifetime Warranty†, including ProSupport 24x7 Advanced Technical Support*, and 3-Year Next Business Day Onsite Hardware Replacement**.



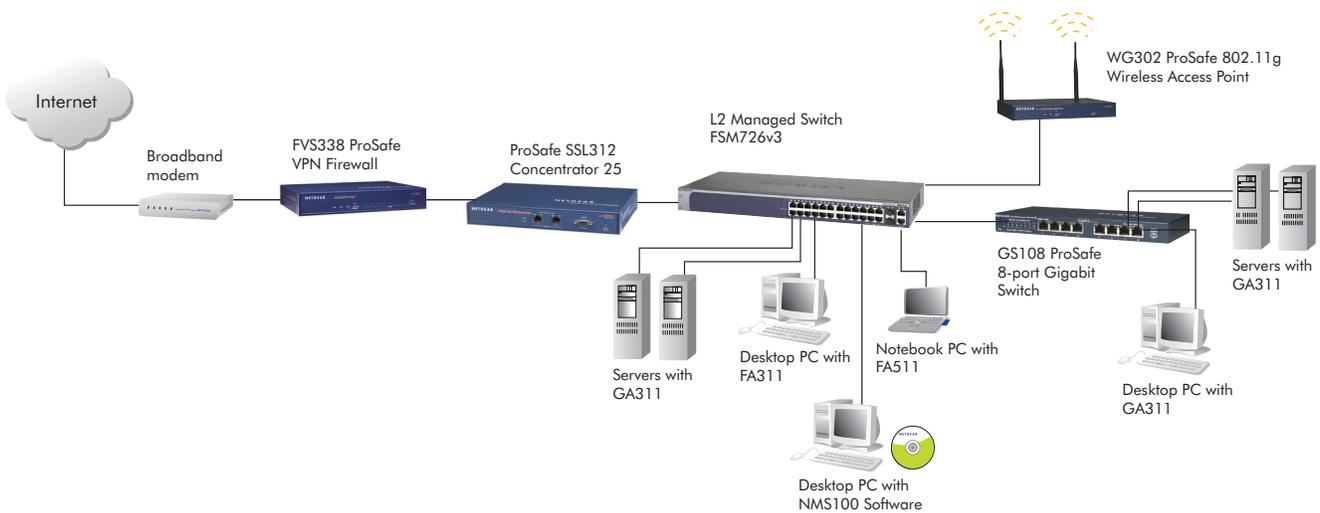

Technical Specifications

• Network Protocol and Standards Compatibility

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.3z 1000BASE-X
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3x flow control

• Layer 2 Services

- IEEE 802.1Q static VLAN (up to 512)
- IEEE 802.1p Class of Service (CoS)
- IEEE 802.1D Spanning Tree Protocol
- MAC-based VLAN
- Voice VLAN
- Guest VLAN
- IP subnet-based VLAN
- IEEE 802.1v protocol VLAN & port VLAN
- IEEE 802.1w Rapid Spanning Tree Protocol
- IEEE 802.1s Multiple Spanning Tree Protocol
- IEEE 802.3ad link aggregation (Static, LACP)
- IGMP querier
- IGMP v1, v2, v3 snooping support
- Static multicast filtering
- Ingress rate limit in 1Kbps increments
- Double VLAN (Q-in-Q)
- MLD v1, v2 snooping

• Layer 3 Services

- ARP caching

• Security Service

- IEEE 802.1x port access authentication
- Network storm protection, including broadcast, multicast and unicast traffic
- Protected port
- Private Group VLAN
- MAC filter
- Port security

- DoS
- DHCP snooping
- IP Source Guard
- Dynamic ARP Inspection
- RADIUS (RFC 2865)
- RADIUS accounting
- TACACS+
- Access control lists - MAC, IP, TCP
- Diffserv QoS (RFC 2998)

• Switch Management Specifications

- SNMP v1, v2c, v3 with multiple IP addresses
- RFC 1157, 1901-1910, 2574, 2575
- RFC 768 UDP
- RFC 854-859 telnet
- RFC 951 BOOTP
- RFC 1213 MIB II
- RFC 1757 RMON groups 1,2,3, and 9
- RFC 1215 SNMP traps
- RFC 1493 bridge MIB
- RFC 1643 Ethernet interface MIB
- RFC 1534 DHCP and BOOTP interoperation
- RFC 2030 Simple Network Time Protocol (SNTP)
- RFC 2131, 2132 DHCP and BOOTP
- Private enterprise MIB
- Port mirroring support (many-to-one)
- CPU traffic monitoring
- SYSLOG
- TFTP, SFTP, HTTP, SCP, or local USB flash firmware upgrade
- Port description
- IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
- ANSI/TIA-1057 LLDP Media Endpoint Discovery (LLDP-MED)
- DHCP server

- DHCP/BOOTP relay (RFC 3046, option 82)
- DHCP L2 relay
- DNS caching

• Single IP Address Management (firmware version 7.3 or higher)

- Manage up to 48 fully managed switches
- Feature can be used with the following models:
 - FSM726E, FSM7226RS, FSM7250RS
 - FSM7328S, FSM7352S, FSM7328PS, FSM7352PS
 - GSM7224R, GSM7248R
 - GSM7328S, GSM7328FS, GSM7352S
 - FSM726v3
 - GSM7224v2
 - GSM7248v2

• User Interfaces

- Command-line interface (CLI) via console port
- Prosafe Control Center Web-based management via embedded HTTP server protected with Secured Sockets Layer (HTTPS)
- (SSLv3) or Transport Layer Security (TLS v1)
- Telnet remote login (5 sessions) securable with Secure Shell (SSH v1.5, v2)

• LEDs

- Per port: Speed, link, activity
- Per device: Power, fan status

• Physical Interfaces

- 24 RJ-45 connectors for 10BASE-T, 100BASE-TX (Auto Uplink and auto negotiate on all ports)
- 2 1000Base-T with optional SFP connectors for fiber connection
- RS-232 console port

• Performance Specifications

- Forwarding modes: Store and forward
- Bandwidth: 8.8 Gbps; 6.5 Mpps
- Switch latency: Less than 80 microseconds for 64-byte frames
- System memory: 128 MB
- Packet buffer memory: 1 MB
- Code storage (flash): 32 MB
- MAC address size: 8 K
- Number of VLANs: 512 (1-4093)
- Number of trunks: 24
- Number of QoS queues: 8
- Jumbo frame support: up to 9 K packet size
- Number of Multicast groups: 256

• Electrical Specifications

- Power consumption: 15W
- 100-240V AC/50-60 Hz universal input

• Physical Specifications

- Dimensions (w x d x h): 440 x 205 x 43 mm (17.32 x 8.1 x 1.7 in)
- Weight: 2.8 kg (6.1 lb)
- Acoustic noise: (ANSI-S10.12) 36.6 dB
- Fan speed: thermal controlled up to 6000 rpm
- Heat dissipation: 50 Btu/hr
- Mean time between failures (MTBF): 562,110 hours (~64 years)
- Thermal sensor

• Environmental Specifications

- Operating temperature: -5° to 50° C (23° to 131° F)
- Storage temperature: -20° to 70° C (-4° to 158° F)
- Operating humidity: 90% maximum relative humidity, non-condensing
- Storage humidity: 95% maximum relative humidity, non-condensing
- Operating altitude: 10,000 ft (3,000 m) maximum
- Storage altitude: 10,000 ft (3,000 m) maximum

• Electromagnetic Emissions

- CE mark, commercial
- FCC Part 15 Class A
- VCCI Class A
- EN 55022 (CISPR 22), Class A
- C-Tick

• Electromagnetic Immunity

- EN 50082-1, EN 55024

• Safety

- CE mark, commercial
- CSA certified (CSA 22.2 #950)
- UL listed (UL 1950)
- CUL IEC 950
- EN 60950

Warranty and Support

- ProSafe Lifetime Warranty†
- ProSupport Lifetime 24x7 Advanced Technical Support*
- Next business day onsite hardware replacement support, 3 years (included)**

Package Contents

- ProSafe L2 Managed Switch (FSM726v3)
- Power cable
- Null modem cable
- Rubber footpads for tabletop installation
- Rack-mount kit
- Quick Installation guide
- Resource CD-ROM with user manual
- ProSafe NMS100 30-Day Trial CD-ROM
- Warranty/support information card

NETGEAR Related Products

- 1000BASE-SX SFP GBIC (AGM731F)
- 1000BASE-LX SPF GBIC (AGM732F)
- 1000BASE-ZX SFP GBIC (AGM733)
- NMS100 Network Management Software

ProSupport™ Service Packs Available

- XPressHW, Category 1: PRR0331 (3-year next-business day hardware replacement contract, applicable where next business day onsite hardware replacement is not available)

Ordering Information

- North America: FSM726-300NAS
- Europe: FSM726-300EUS
- Asia: FSM726-300AJS

NETGEAR®

350 E. Plumeria Drive
San Jose, CA 95134-1911 USA
1-888-NETGEAR (638-4327)
E-mail: info@NETGEAR.com
www.NETGEAR.com

© 2012 NETGEAR, Inc. NETGEAR, the NETGEAR Logo, Connect with Innovation, ProSafe and ProSupport are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved.

* 24x7 Lifetime Advanced Technical Support includes Remote Diagnostics performed by our technical experts for prompt resolution of technical issues.

** 3-year Next business day onsite hardware replacement support included: see <http://onsite.netgear.com> for coverage, availability and terms and conditions.

† Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 5 years.