


NETGEAR®

Installation Guide


Connect with Innovation™

ProSafe® Auxiliary Power Supply APS300W

The ProSafe® Auxiliary Power Supply APS300W provides a replaceable power supply for the XSM7224S 10 Gigabit Switch. The XSM7224S Switch supports dual APS300W power supplies, so you can make use of another APS300W while replacing the failed power supply. Refer to the switch Hardware Installation Guide for additional information. When another APS300W is used, the failed APS300W can be replaced without stopping the switch or requiring a reboot.

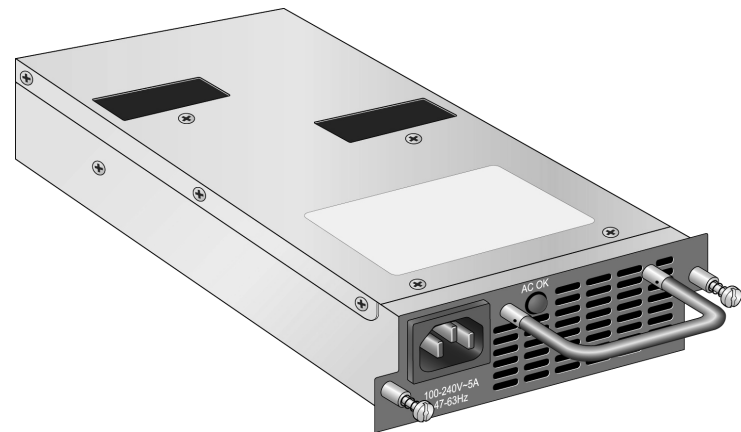

Replacing an APS300W Power Supply

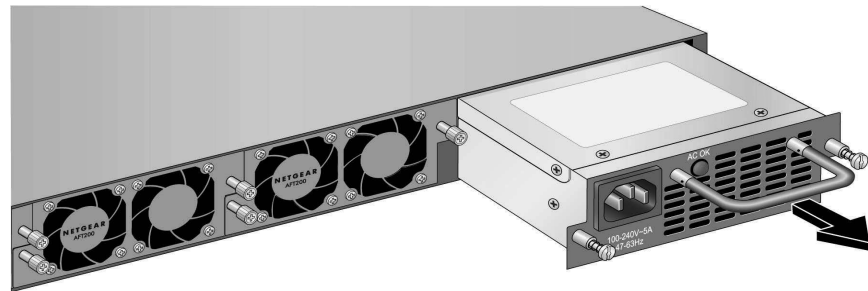

Removing an APS300W Power Supply

To remove the APS300W power module, follow these steps:

1. Disconnect the power cord from the power module.
2. Remove the power cord from the power connector.
3. Loosen the two captive screws on the power module.
4. Remove the power module from the power module slot by pulling on the extraction handle.

Installing an APS300W Power Supply

To install an APS300W power module, follow these steps:

WARNING!! When inserting a power module into the switches, do not use unnecessary force. Doing so can damage the connectors on the rear of the supply and on the midplane.

1. Insert the new power supply module into the power module slot, and gently push the module into the slot.
2. Align the two captive screws with the screw holes in the switch's back panel.
3. Using a screwdriver, gently tighten the captive screws.
4. Insert the AC power cord into the power module and connect the power cord to an AC outlet.

Specifications

Specifications	
Dimensions (HxWxD)	1.60" x 4.90" x 9.00" (40.6 x 124.4 x 228.6mm)
Weight	2.82 lb (1.28kg)
Operating Temperature	32 to 122 °F (0 to 50 °C)
Storage Temperature	-49 to 185 °F (-45 to 85 °C)
Operative relative humidity	10 to 90% and non condensing
MTBF	938,490 Hours (~107 years) @ 25°C 421,664 Hours (~48 years) @ 50 °C

Technical Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at *http://www.NETGEAR.com/register*. Registration is required before you can use our telephone support service. Registration via our website is strongly recommended.

Go to *http://kbserver.netgear.com* for product updates and support information.

For complete DoC please visit the NETGEAR EU Declarations of Conformity website at: *http://kb.netgear.com/app/answers/detail/a_id/11621/*



201-12694-01

November 2010



This symbol was placed in accordance with the European Union Directive 2002/96 on the Waste Electrical and Electronic Equipment (the WEEE Directive). If disposed of within the European Union, this product should be treated and recycled in accordance with the laws of your jurisdiction implementing the WEEE Directive.

©2010 by NETGEAR, Inc. All rights reserved. NETGEAR and the NETGEAR logo are registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice.